



# TEMCO ALLOY C22600

## TECHNICAL DATA SHEET

*UNCONTROLLED COPY*

**COMMON USES:** TEMCO Alloy C22600 has been specifically developed for rotor bar applications. Close control of the chemistry, including trace elements, at our in-house casting facility allows us to control the electrical properties within a very narrow range. This insures our customers the same electrical properties each time they order. Consult our Sales Department to discuss your specific application.

**\*\*Please Note: Minimum order quantity is 6000 pounds for this alloy\*\***


CHEMISTRY		
ELEMENT	NOMINAL %	RANGE %
Copper	87.5	86 – 89
Zinc	12.5	Remainder
Lead	--	.05 max.
Iron	--	.05 max.

TEMPER	TYPICAL PROPERTIES			
	TENSILE STRENGTH ksi (MPa)	YIELD STRENGTH* ksi (MPa)	ELONGATION %	HARDNESS ROCKWELL
Annealed (061)	39 (270)	14 (95)	57	RF 50
Ho1 (10%)	43 (295)	38 (260)	41	RB 36
Ho2 (20%)	50 (345)	48 (330)	21	RB 58
Ho4 (36%)	60 (415)	54 (270)	16	RB 68

\*0.5 % EXTENSION UNDER LOAD

CAPABILITY FOR BEING COLD WORKED	EXCELLENT
CAPABILITY FOR BEING HOT WORKED	GOOD
HOT WORKING TEMPERATURE	1400° - 1650° F 750° - 900° C
ANNEALING TEMPERATURE	800° - 1400° F 425° - 750° C

SOFT SOLDERING	EXCELLENT
SILVER ALLOY BRAZING	EXCELLENT
OXYACETYLENE WELDING	GOOD
COATED METAL ARC WELDING	NOT RECOMMENDED
RESISTANCE WELDING	FAIR

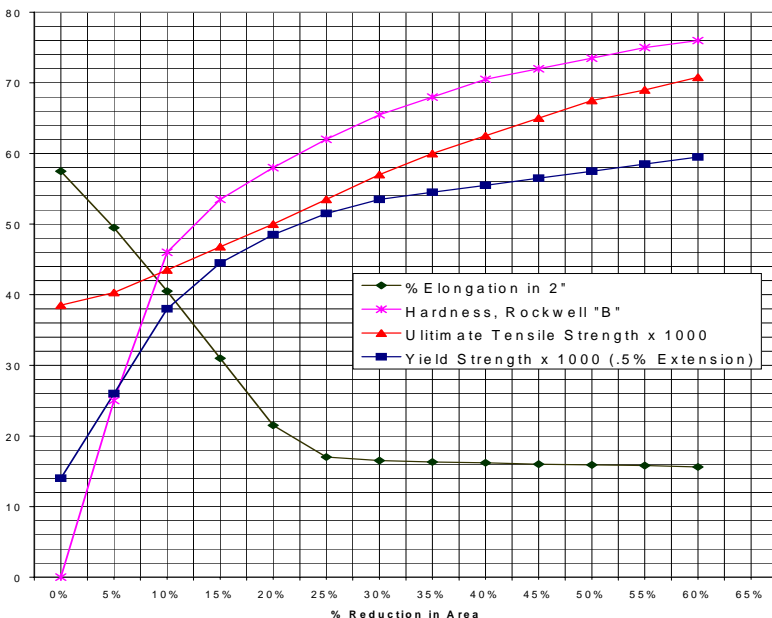

### MISCELLANEOUS INFORMATION:

MACHINEABILITY RATE\* 30

\*Free Machining Brass = 100

CONDUCTIVITY 40 % ± 1.5 % IACS @ 68° C

DENSITY .317 lb/cu in (8.78 gm/cu cm @ 20° C)

NEAREST APPLICABLE ASTM SPEC: NONE